


Section View

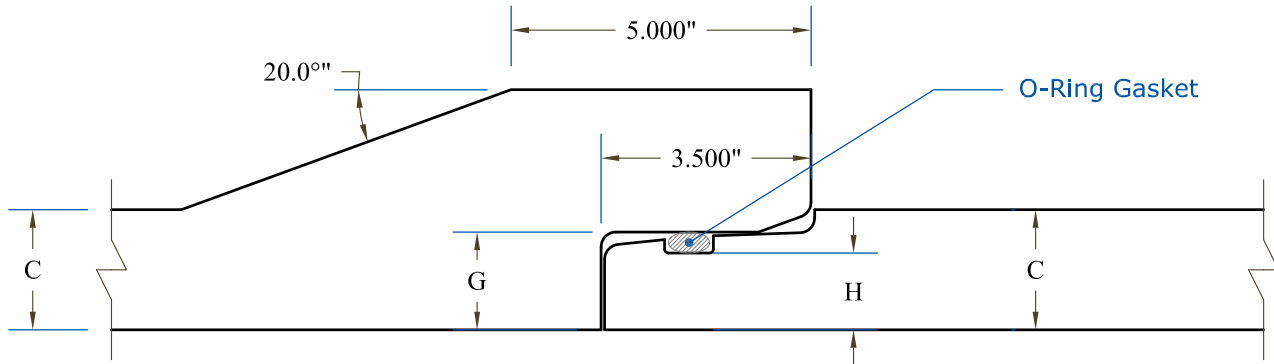

Connection Detail

Rebar Schedule Wall Type "B"			
Ø	Class	Cage Min Area	Sp. of Circ. Wires Min/Max
12"	V	.10	2"/4"
15"	III	.07	2"/4"
15"	IV	.10	2"/4"
15"	V	.14	2"/4"
18"	III	.07	2"/4"
18"	IV	.14	2"/4"
18"	V	.14	2"/4"

	12"Ø	15"Ø	18"Ø
<b>A</b>	16.000"	19.500"	23.000"
<b>B</b>	12.000"	15.000"	18.000"
<b>C</b>	2.000"	2.250"	2.500"
<b>D</b>	2.371"	2.395"	2.645"
<b>E</b>	7.629"	9.355"	10.855"
<b>F</b>	20.000"	23.500"	27.000"
<b>G</b>	1.629"	1.855"	1.855"
<b>H</b>	1.278"	1.504"	1.504"
<b>Weight</b>	880 lbs	1160 lbs	1536 lbs

**Design Notes:**

- Concrete Minimum 5000 psi at 28 days
- Wall Type "B" per ASTM C76