


Note: Eye bolt must be fully threaded into insert prior to picking. Eye bolt picking must be done only in the vertical direction to prevent lifting eye bolt damage.

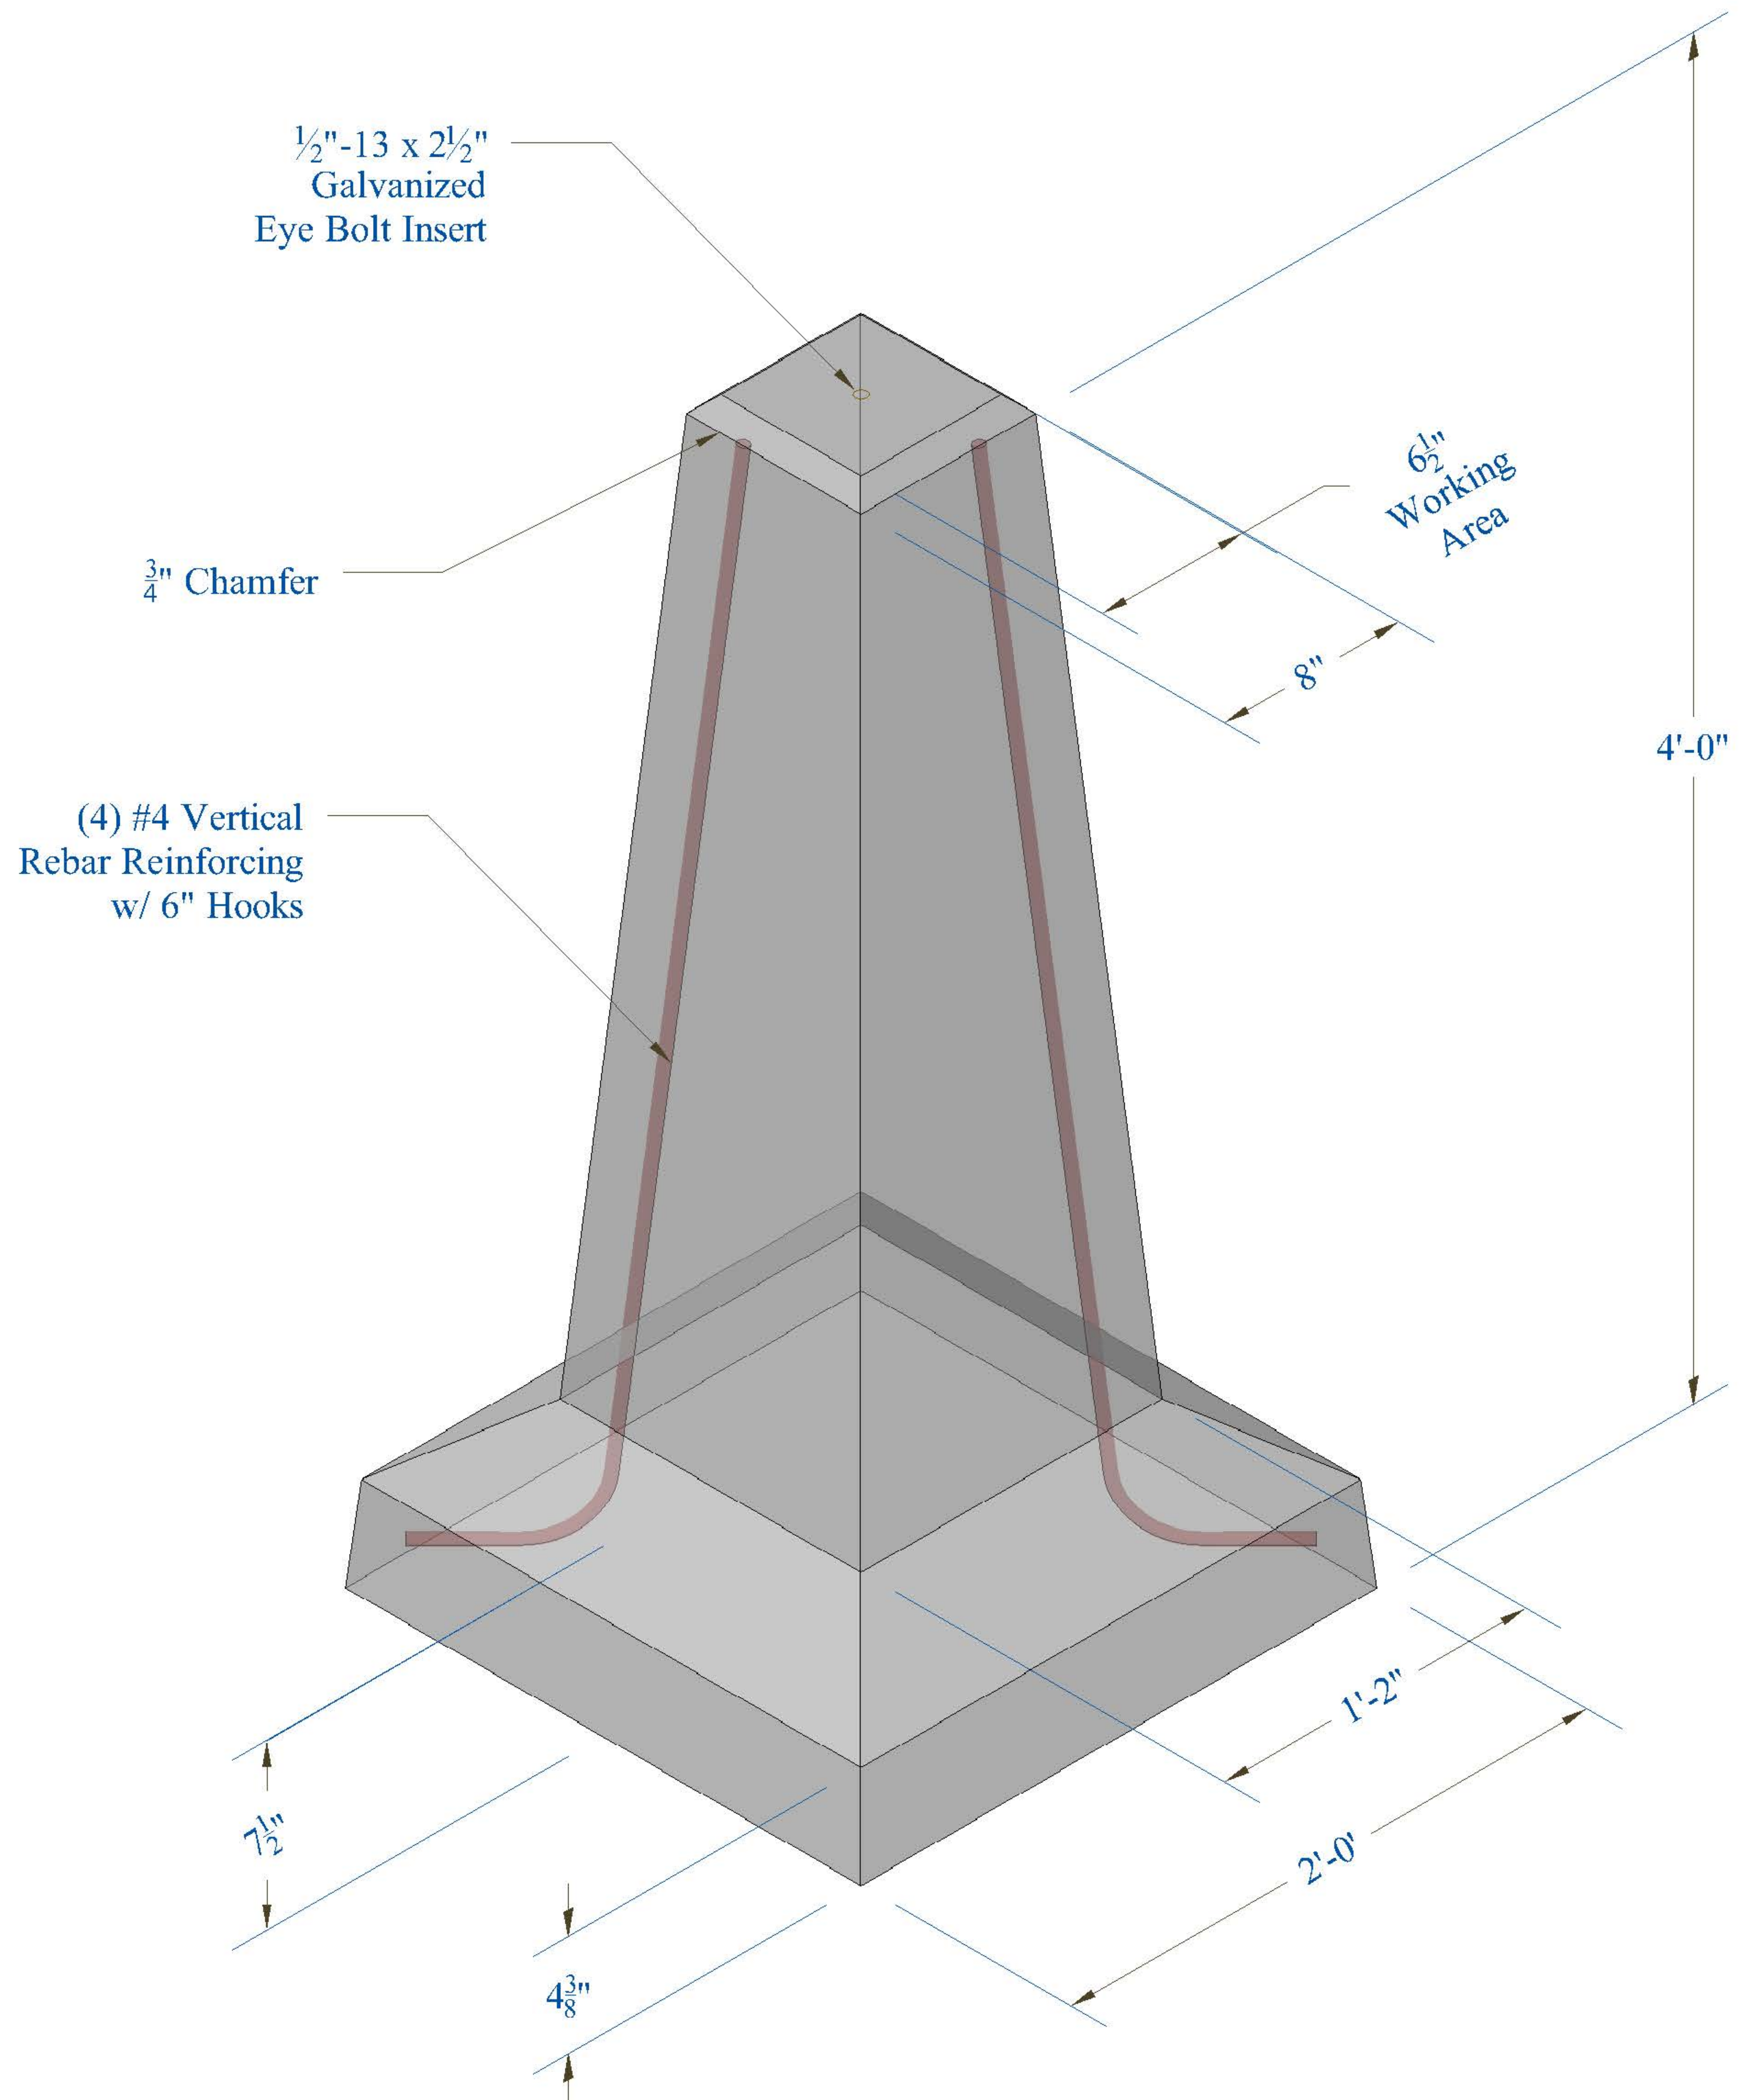

Weight: 740 lbs

Design Notes:

- Concrete Minimum 5000 psi at 28 days w/ Fiber Mesh 3 lbs/yd
- Minimum Allowable Bearing Pressure = 2,000 psf
- Maximum Applied Axial Loading = 8,000 lbs (Service Load)

-Grade 60 Steel Reinforcing